


Provide 10 amp SPDT (Form C) contacts in an encapsulated relay module that accepts multiple input voltages. Commonly used as a remote relay for control or status feedback in HVAC, temperature control, fire alarm, building automation and lighting control systems.

- Powered by any one of multiple input voltages.
- 10 amp SPDT, Form C relay contacts.
- Encapsulated with leadwire connections.
- Wirenuts, adhesive back tape, screw supplied for surface, handibox or panel mounting.
- Red LED indication when relay is energized (PAM-1).

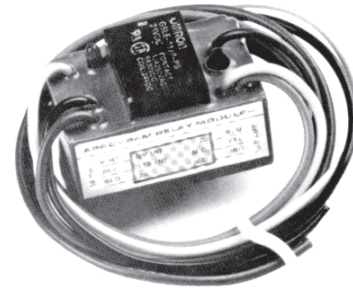

APPROVALS: U.L. listed.

RELAY TYPE: SPDT, Form C.

CONTACT RATINGS: 10 amps @ 115 vac; 7 amps @ 28 vdc;
250 microamps @ 5 vdc.

COIL VOLTAGE:

PAM-1: 24 vac, 115 vac, 24 vdc.

PAM-4: 9 to 40 vdc.


POWER CONSUMPTION: 15 ma.

AMBIENT TEMPERATURE: -58°F to 185°F (-50°C to 85°C).


WIRING CONNECTIONS: 10-inch leadwires, 18 awg.

MOUNTING: Surface; or secured in-place with leadwires.

DIMENSIONS: 1.5"H x 1"W x 0.875"D (38mm x 25.4mm x 22mm).

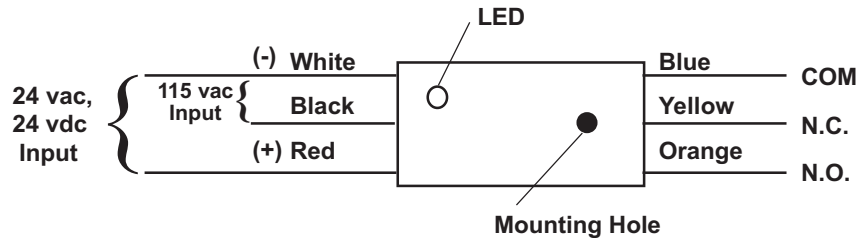

PAM-1 RELAY WIRING

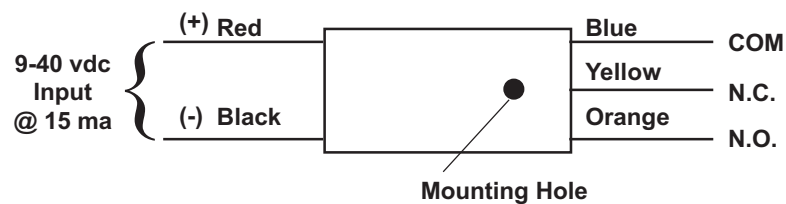

PAM-4 RELAY WIRING

Model	Coil Voltage	Relay Type	Contact Rating	LED	Description
PAM-1	24 vac 115 vac; 24 vdc	SPDT	10 amps @ 115 vac; 7 amps @ 28 vdc; 250 uamps @ 5 vdc	yes	Encapsulated; Surface Mount; 10-inch Leadwires
PAM-4	9 to 40 vdc	SPDT		no	